



Clear Vertical Grain Cedar T&G Paneling

- Face:** Western Red Cedar Vertical Grain
- Patterns:** Micro-V Joint (aka Eased Edge)
Fine Line (aka Nickle Gap)
- Widths:** 6" nominal, 5-1/4" face
4" nominal, 3-1/4" face
- Lengths:** 7' to 18' mixed lengths
- Thickness:** 1" nominal (11/16")
- Conversion Factor:** 6" = 1.14 : 4" = 1.23

Dolly Varden is a classic tongue & grooved Western Red Cedar Paneling that uses Shakertown's 60 years of experience to laminate cedar to exterior backing. This system provides you a stronger, more durable engineered paneling with qualities not found in solid cedar.

Composition and Materials: Dolly Varden T&G panels are composed of genuine Western Red Cedar and fir bonded with exterior adhesives (under pressure) into an exclusive 7-ply engineered panel. The bonding method of full surface gluing meets the weather test and other requirements for exterior siding as specified under U.S. PS 1-09. Insulation values up to R 1.65 are superior to other siding products.

Finishes: Manufactured in laminated natural Western Red Cedar. Products may be sealed or stained in the field, or factory pre-finished.

Basic Uses: For exterior paneling on walls or soffits. For interior walls or ceilings.

Limitations: May not be used as a substitute for shear panel, although may be used over shear panels.


Nails: Use of proper nails is important. For exterior applications use a non-corrosive fastener; stainless steel, hot-dipped galvanized or aluminum. Fasteners must be of sufficient length to penetrate into nailable wood, a minimum of 1-1/4". A stainless 6d splitless siding nail is preferred.

Fire Ratings:

Walls: Approved WUI 12-7A-1 over minimum OSB sheathing: #8160-2032-0003.

Soffits: Approved WUI 12-7A-3 direct to trusses: #8160-2032-0004.

1-Hour: When installed per International Building Code, Section 15-1.1 of Table 721.1

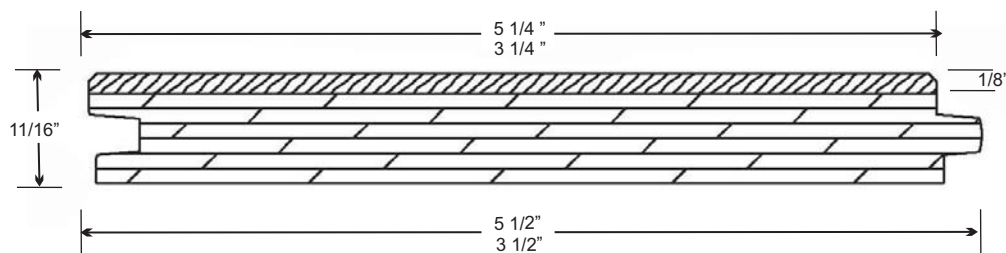

Micro-V



Fine Line

Shakertown
1200 Kerron Street
Winlock, WA 98596

800-426-8970

www.Shakertown.com